

# THT1000

EN

## Tablet Breaking Force Tester

A breaking force tester featuring advanced and precise measuring technologies.




The Bareiss THT1000 is a tablet breaking force tester designed to provide an intuitive user experience thanks to its beautiful UI designs implemented in both its hardware and software.


The breaking force test has a load range of up to 1000 N with the setting for test speed (mm/sec) and addition of force (N/sec). Besides breaking force, the THT1000 can also provide parameters of length, width, thickness and weight of the tablet (an external scale required). A thermal printer can be directly connected to the THT1000 for easy measurement printout.



Breaking  
Force



Thickness



Diameter



Width



External  
Scale



External  
Printer

# THT1000


EN

## MAIN FEATURES


Ethernet LAN port for managing your data with PharmaSoE™ software. From single workstation to a network with multiple clients, ensure seamless compliance with 21 CFR Part 11 regulation.

Exchangeable guiding channels for different tablet shapes.

IntuiEve graphical user interface on a 7" touch screen.

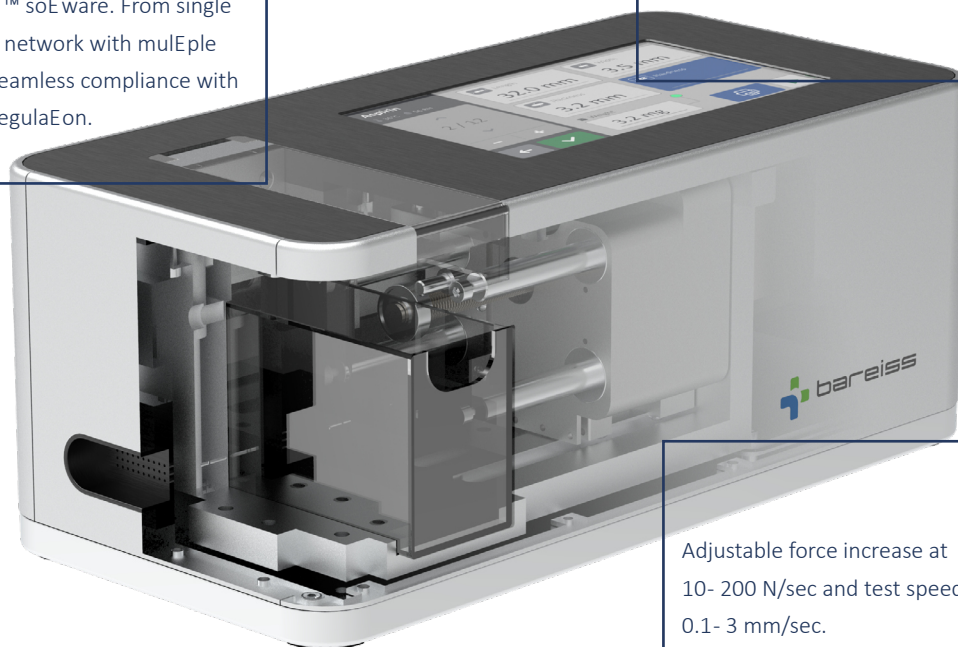

Adjustable force increase at 10- 200 N/sec and test speed at 0.1- 3 mm/sec.

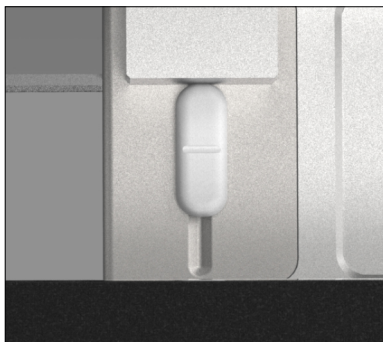

The guiding channel can assist with the tablet orientation to ensure correct measuring position.



Built-in carry handle on both sides for easy transportation.



USB-connected external printer for direct and fast data output. Max. 16 m paper roll per load.

# THT1000

EN

## MAIN FEATURES


PharmaSoE™ is a modularized soEware that is aimed to provide a common platform with integration of different test categories.

Whether it is a standard test for one single measurement or a series of tests that requires a complex test sequence editing, PharmaSoE™ is designed to offer all levels of user's demands.

Features such as user authorization, system log, project management, version control and custom report are all at your fingertips.



PharmaSoE™ has made soEware use easier than it ever was before.

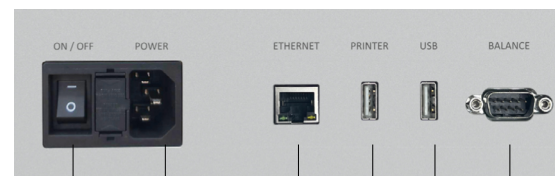

Power switch   Power   LAN   Printer   PC   Balance

The THT1000 can be connected to the Bareiss PharmaSoE™ soEware via ethernet port to ensure 100% CFR 21 Part 11 compliance.

# THT1000

EN

## PRODUCT SPECS

Diameter / Length / Width	Measuring range	1-36 mm
	ResoluEon	0.01 mm
	Units of measurement	mm / inch
Thickness	Measuring range	1-36 mm
	ResoluEon	0.01 mm
	Units of measurement	mm / inch
Hardness	Measuring range	3- 1000 N
	Accuracy	+/- 1N
	Units of measurement	Newton (N), Kilogram-force (kgf), Pound of force (lbf)
Measuring principle	Constant force	10- 200 N/ sec (programmable) (TESTING)
	Constant speed	0.1- 3 mm/sec (programmable)
Interfaces	2 x USB 2.0	
Power supply	100- 240 V, 50-60 Hz, 90 W	

THT1000		
ConfiguraEon	Hardness	●
	Diameter / Length	●
	Width	●
	Thickness	●
	Weight (Integrated)	—
	Weight (External)	○
Dimensions / Weight	LWH 320 x 155 x 130 mm / approx. 9.5 kg	
SoE ware	PharmaSoE™	○

MADE IN GERMANY SINCE 1954.



**BETATEK** INC.  
Instrumentation Superbly Supported  
*L'instrumentation à son meilleur*

654 Petrolia Road,  
Toronto, ON M3J 2W3  
Tel: (416) 736-6166  
Toll-Free: (800) 387 3570  
Fax: (416) 736-9346